



FULL MOON

This product adopts simple and clean concept. low UGR, help offer the most comfortable lighting environment, Up and down light could help make the lighting environment look more spacious.

The product's advantage: uniform luminescence, no spots.

This item has four intallation methods: suface, wall, suspended cable and suspended rod.


Application: lobby, hotel, office etc.

Colors: White, black and silver.

Aluminum frame

5 year warranty


CE RoHs

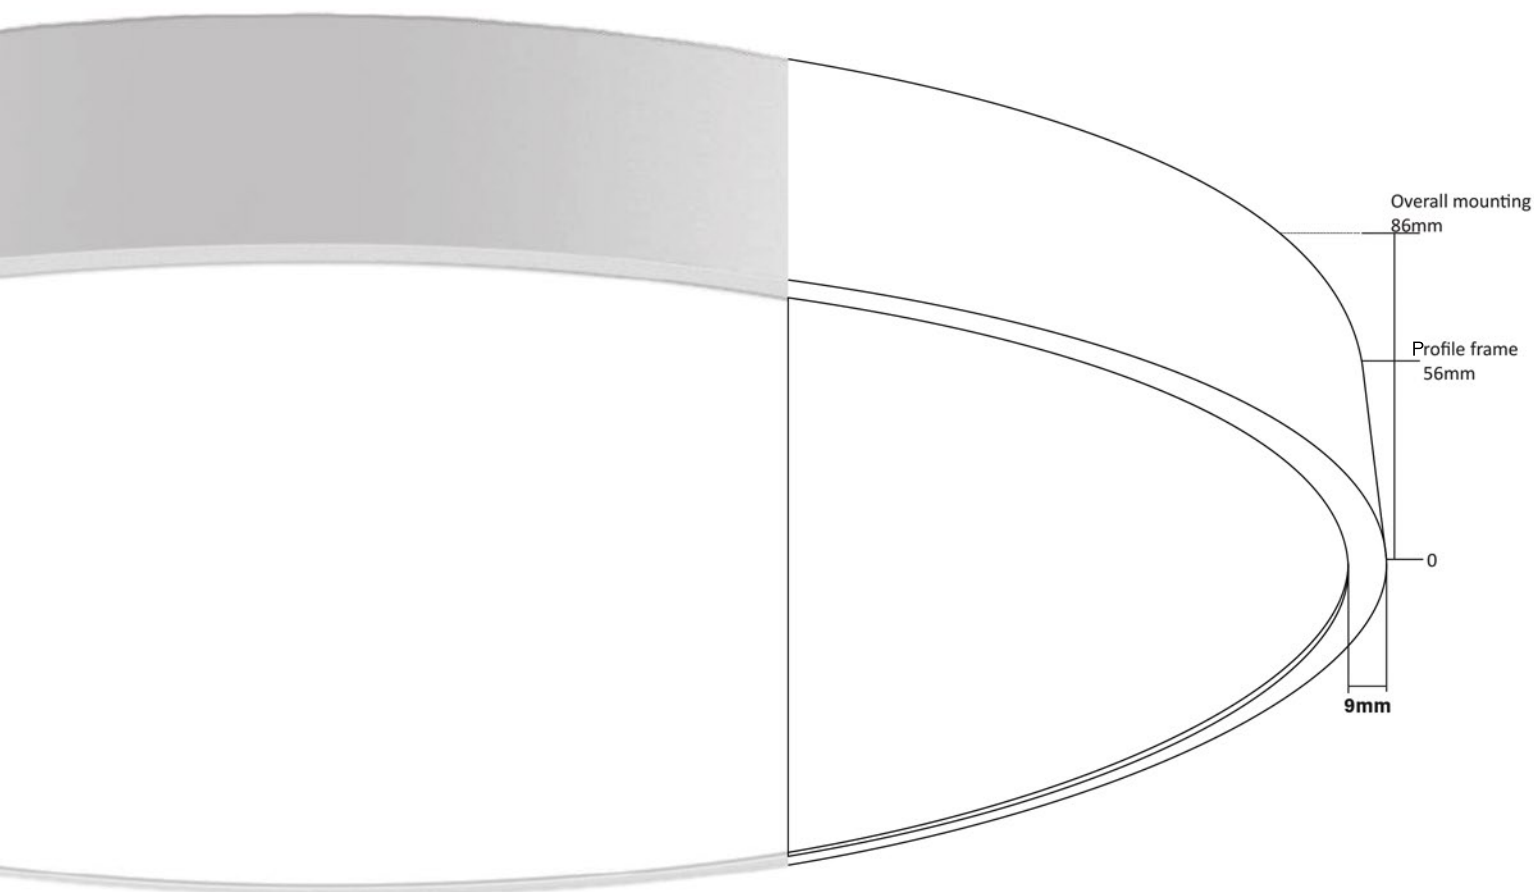

FULL MOON

Round luminaire housing in aluminium, rolled profile, seamlessly welded;
The lightweight deep-drawn steel housing reduces the effort of installation.

	ø 300 mm	ø 450 mm	ø 600 mm	ø 750 mm	ø 900 mm	ø 1200 mm
MOUNTING						
wall	•	•	•			
ceiling	•	•	•	•	•	•
suspended cable		•	•	•	•	•
suspended rod		•	•	•	•	•

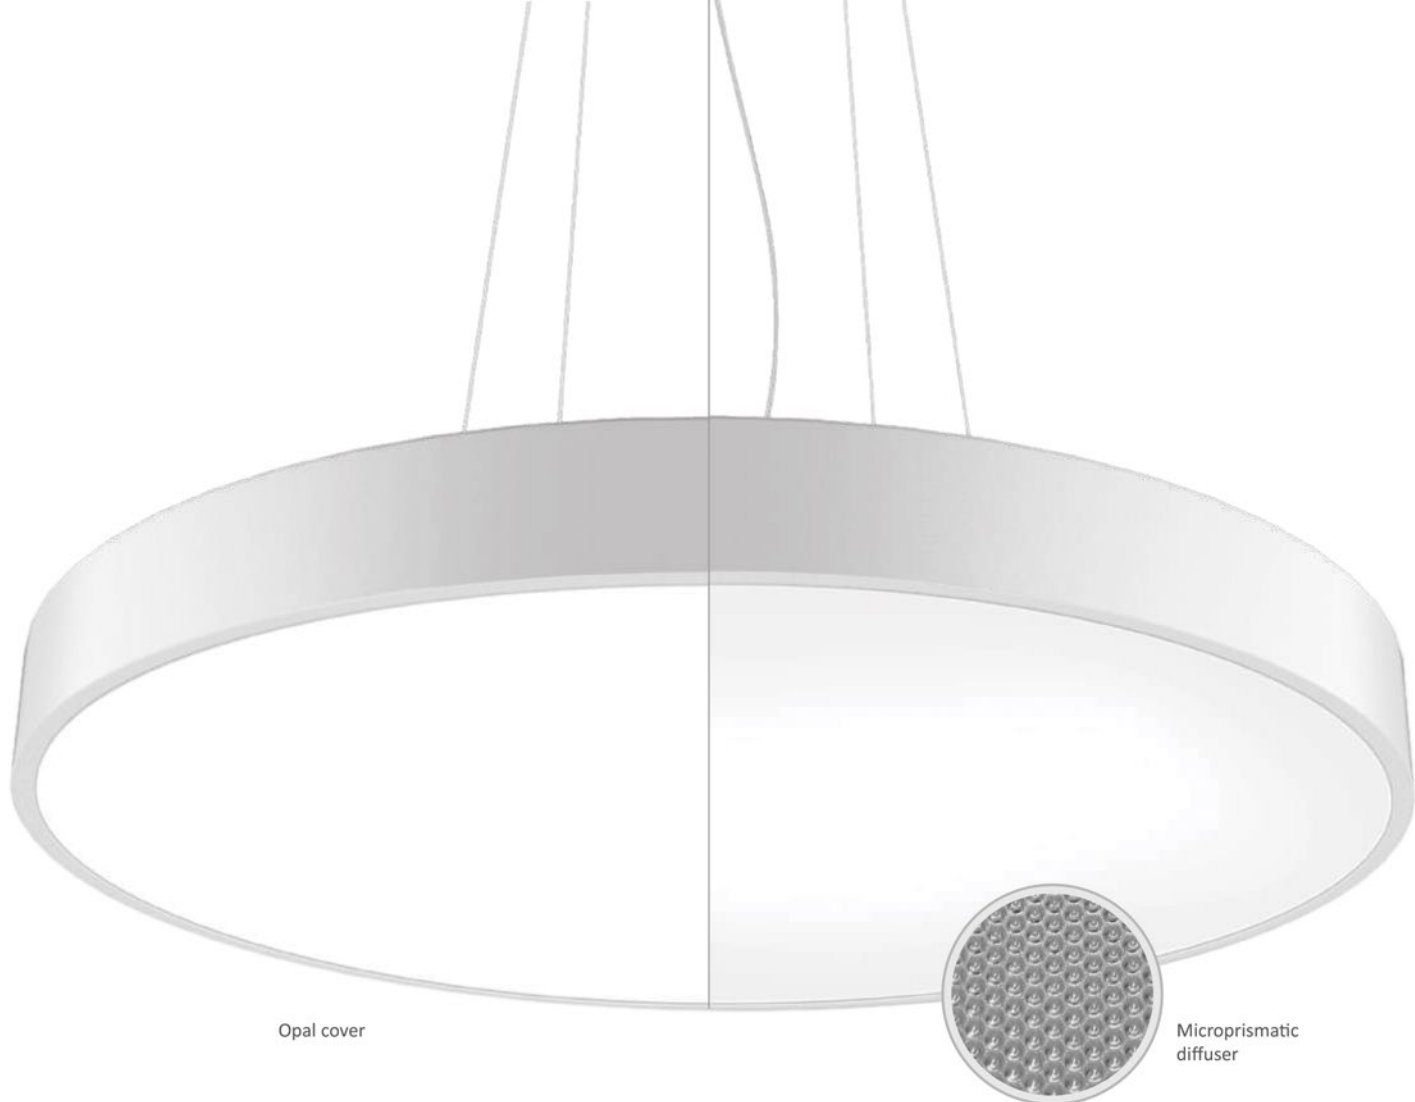

FULL MOON

Available in different versions. Select opal cover, or the microprismatic variant for glare-free office lighting. 6 kinds of sizes, 300mm, 435mm, 585mm, 735mm, 875mm, 1150mm. 3 colors right now, black, white and silver. Different lighting ways: Direct lighting or indirect lighting. Especially in large projects, the wide range of options has many benefits: suitable for different projects, satisfying different customers' requirements.

FULL MOON

suspended



Quickinfo

GENERAL

suspended

IP 20

LED

up to 120lm/w

2700-6500K

CRI >80Ra/90Ra

SDCM≤3

ESTIMATED LED LIFETIME

L90/50,000h

SIZE

300mm,450mm,600mm,750mm,900mm,1200mm

OPTICAL

direct,direct/indirect illumination

PS cover opal

microprismatic (UGR<19)

beam angle (degree) : 110°

ELECTRICAL

non DIM, DIM DALI,DIM 1-10V, DIM TRAIC

PF>0.9

PHYSICAL


aluminium

powder-coated

MATERIAL COLOUR

standard color:black/ white/ silver


choose colour :

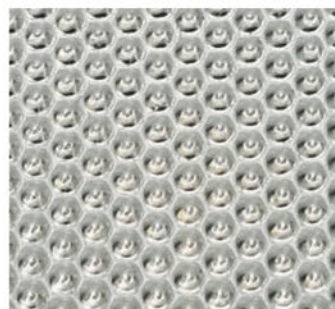

microprismatic



direct/ indirect light
distribution

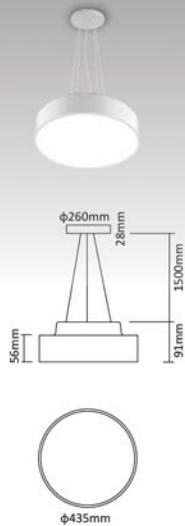

450 suspended

DIRECT




POWER	CCT	LUMINANCE
30W	2700-6500K	3300lm
40W	2700-6500K	4400lm

DIRECT/INDIRECT



POWER	CCT	LUMINANCE
30W	2700-6500K	3300lm
40W	2700-6500K	4400lm

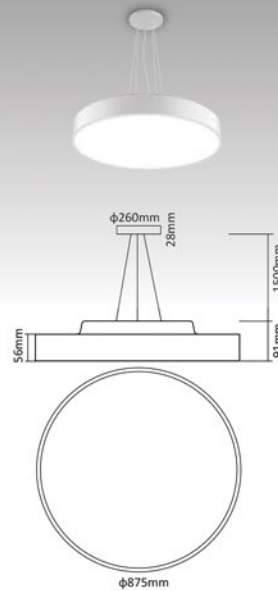

900 suspended

DIRECT




POWER	CCT	LUMINANCE
70W	2700-6500K	7000lm
90W	2700-6500K	9000lm

DIRECT/INDIRECT



POWER	CCT	LUMINANCE
70W	2700-6500K	7000lm
90W	2700-6500K	9000lm

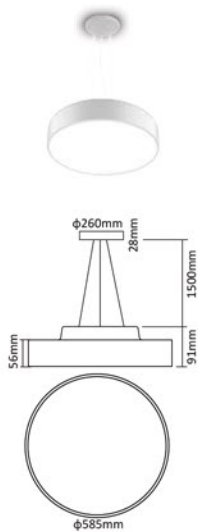

600 suspended

DIRECT




POWER	CCT	LUMINANCE
40W	2700-6500K	4400lm
60W	2700-6500K	6600lm

DIRECT/INDIRECT



POWER	CCT	LUMINANCE
40W	2700-6500K	4400lm
60W	2700-6500K	6600lm

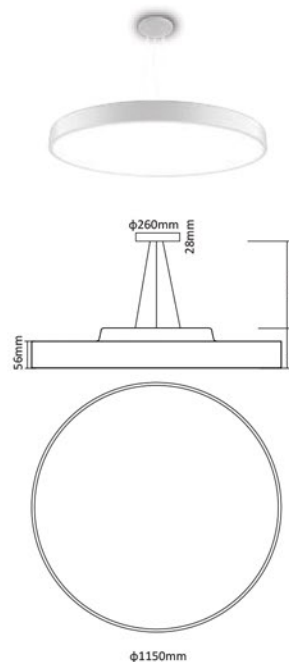

1200 suspended

DIRECT




POWER	CCT	LUMINANCE
90W	2700-6500K	9000lm
120W	2700-6500K	12000lm

DIRECT/INDIRECT



POWER	CCT	LUMINANCE
90W	2700-6500K	9000lm
120W	2700-6500K	12000lm

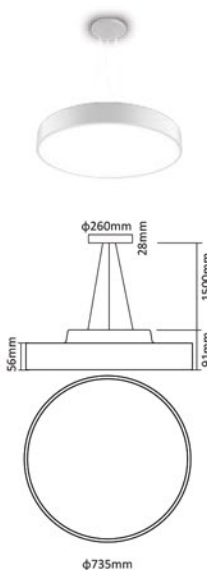

750 suspended

DIRECT



POWER	CCT	LUMINANCE
50W	2700-6500K	5000lm
70W	2700-6500K	7000lm

DIRECT/INDIRECT



POWER	CCT	LUMINANCE
50W	2700-6500K	5000lm
70W	2700-6500K	7000lm

FULL MOON

suspended rod mounted



Quickinfo

GENERAL

suspended rod mounted

IP 20

LED

up to 120lm/w

2700-6500K

CRI >80Ra/90Ra

SDCM≤3

ESTIMATED LED LIFETIME

L90/50,000h

SIZE

300mm,450mm,600mm,750mm,900mm


OPTICAL

direct, direct/indirect illumination

PS cover opal

microprismatic (UGR<19)

beam angle (degree) : 110°



microprismatic



direct/ indirect light
distribution

ELECTRICAL

non DIM, DIM DALI, DIM 1-10V, DIM TRAIC

PF>0.9

PHYSICAL

aluminium

powder-coated

MATERIAL COLOUR


standard color:black/ white/ silver

choose colour :



COLOUR TEMPERATURE

2700-6500K optional

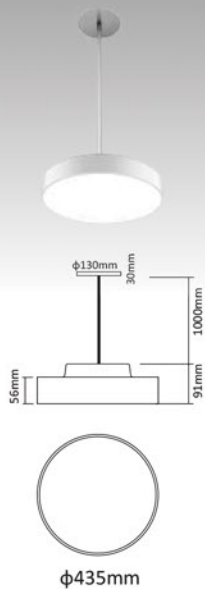

450 suspended rod mounted

DIRECT




POWER	CCT	LUMINANCE
30W	2700-6500K	3300lm
40W	2700-6500K	4400lm

DIRECT/INDIRECT



POWER	CCT	LUMINANCE
30W	2700-6500K	3300lm
40W	2700-6500K	4400lm

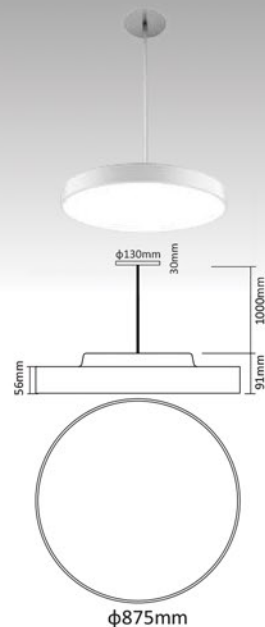

900 suspended rod mounted

DIRECT




POWER	CCT	LUMINANCE
70W	2700-6500K	7000lm
90W	2700-6500K	9000lm

DIRECT/INDIRECT



POWER	CCT	LUMINANCE
70W	2700-6500K	7000lm
90W	2700-6500K	9000lm

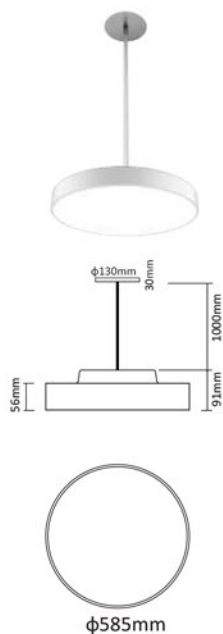

600 suspended rod mounted

DIRECT




POWER	CCT	LUMINANCE
40W	2700-6500K	4400lm
60W	2700-6500K	6600lm

DIRECT/INDIRECT



POWER	CCT	LUMINANCE
40W	2700-6500K	4400lm
60W	2700-6500K	6600lm

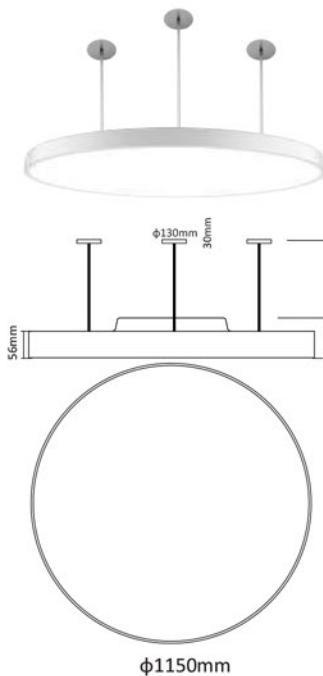

1200 suspended rod mounted

DIRECT




POWER	CCT	LUMINANCE
90W	2700-6500K	9000lm
120W	2700-6500K	12000lm

DIRECT/INDIRECT



POWER	CCT	LUMINANCE
90W	2700-6500K	9000lm
120W	2700-6500K	12000lm

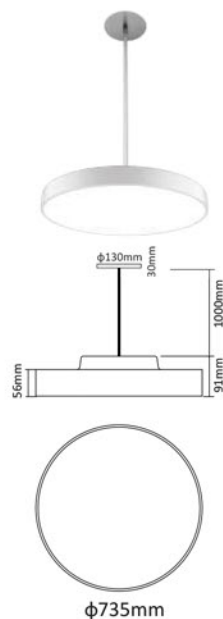

750 suspended rod mounted

DIRECT



POWER	CCT	LUMINANCE
50W	2700-6500K	5000lm
70W	2700-6500K	7000lm

DIRECT/INDIRECT



POWER	CCT	LUMINANCE
50W	2700-6500K	5000lm
70W	2700-6500K	7000lm

FULL MOON

surface/ceiling



Quickinfo

GENERAL

ceiling/ wall

IP 20

LED

up to 120lm/w

2700-6500K

CRI >80Ra/90Ra

SDCM≤3

ESTIMATED LED LIFETIME

L90/50,000h

SIZE

300mm,450mm,600mm,750mm,900mm,1200mm


OPTICAL

direct,direct/indirect illumination

PS cover opal

microprismatic (UGR<19)

beam angle (degree) : 110°



microprismatic



direct/ indirect light
distribution

ELECTRICAL

non DIM, DIM DALI,DIM 1-10V, DIM TRAIC

PF>0.9

PHYSICAL

aluminium

powder-coated

MATERIAL COLOUR


standard color:black/ white/ silver

choose colour :



COLOUR TEMPERATURE

2700-6500K optional

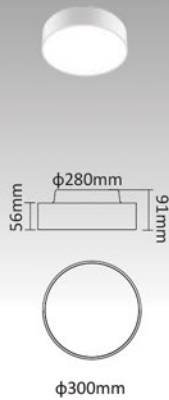

300 ceiling/wall

DIRECT




POWER	CCT	LUMINANCE
15W	2700-6500K	1650lm
25W	2700-6500K	2750lm

DIRECT/INDIRECT



POWER	CCT	LUMINANCE
15W	2700-6500K	1650lm
25W	2700-6500K	2750lm

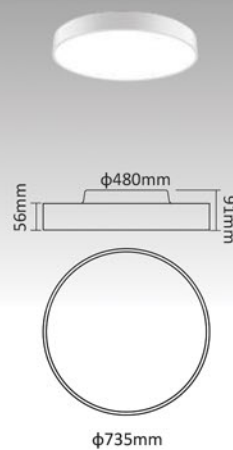

750 ceiling/wall

DIRECT




POWER	CCT	LUMINANCE
50W	2700-6500K	5000lm
70W	2700-6500K	7000lm

DIRECT/INDIRECT



POWER	CCT	LUMINANCE
50W	2700-6500K	5000lm
70W	2700-6500K	7000lm

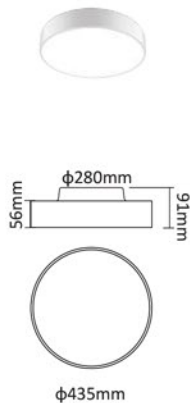

450 ceiling/wall

DIRECT




POWER	CCT	LUMINANCE
30W	2700-6500K	3300lm
40W	2700-6500K	4400lm

DIRECT/INDIRECT



POWER	CCT	LUMINANCE
30W	2700-6500K	3300lm
40W	2700-6500K	4400lm

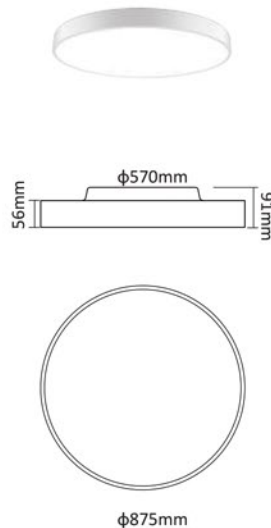

900 ceiling/wall

DIRECT




POWER	CCT	LUMINANCE
70W	2700-6500K	7000lm
90W	2700-6500K	9000lm

DIRECT/INDIRECT



POWER	CCT	LUMINANCE
70W	2700-6500K	7000lm
90W	2700-6500K	9000lm

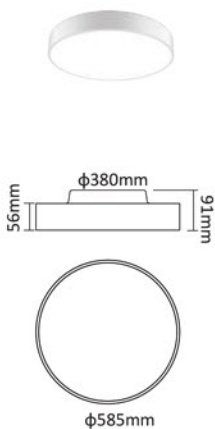

600 ceiling/wall

DIRECT




POWER	CCT	LUMINANCE
40W	2700-6500K	4400lm
60W	2700-6500K	6600lm

DIRECT/INDIRECT



POWER	CCT	LUMINANCE
40W	2700-6500K	4400lm
60W	2700-6500K	6600lm

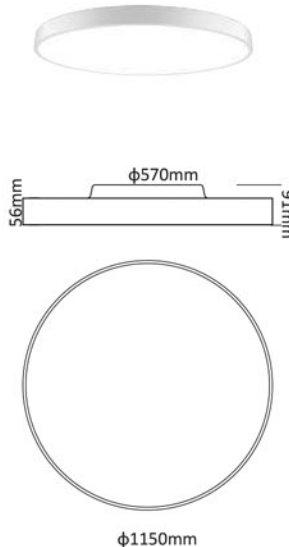

1200 ceiling/wall

DIRECT




POWER	CCT	LUMINANCE
90W	2700-6500K	9000lm
120W	2700-6500K	12000lm

DIRECT/INDIRECT



POWER	CCT	LUMINANCE
90W	2700-6500K	9000lm
120W	2700-6500K	12000lm

SIZE

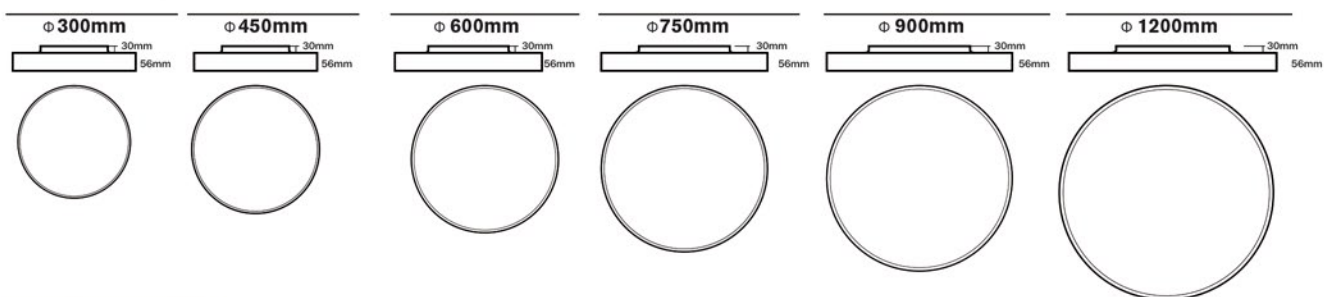

Mounting


Wall




Ceiling



Suspended cable




Suspended rod




Type

Wall/Ceiling direct




Suspended direct



Wall/Ceiling direct/
indirect



Suspended direct/
indirect





Ordering Information

Example: PR-FULLMOON-2700-600-D-O-S-A

Series	Size	Colour Temp.	Distribution	Optics	Mounting	Finish
PR-FULLMOON	400	2700	D: Direct	O: Opal	S: Surface	A: Aluminum
	600	6500	DI: Direct/Indirect	M: Microprismatic	W: Wall*	P: Powder Coated
	750				SC: Suspended Cable	
	900				SR: Suspended Rod	
	1200					

*: Wall Mounted option is not available in larger than 600 mm in diameter.